


## Product Presentation



## Application


Digital Hydrostatic Tester is used to test the waterproof properties of fabrics through waterproofing work such as canvas, coated fabrics, hood fabric, tarpaulin, rain-proof fabrics and geotextile.

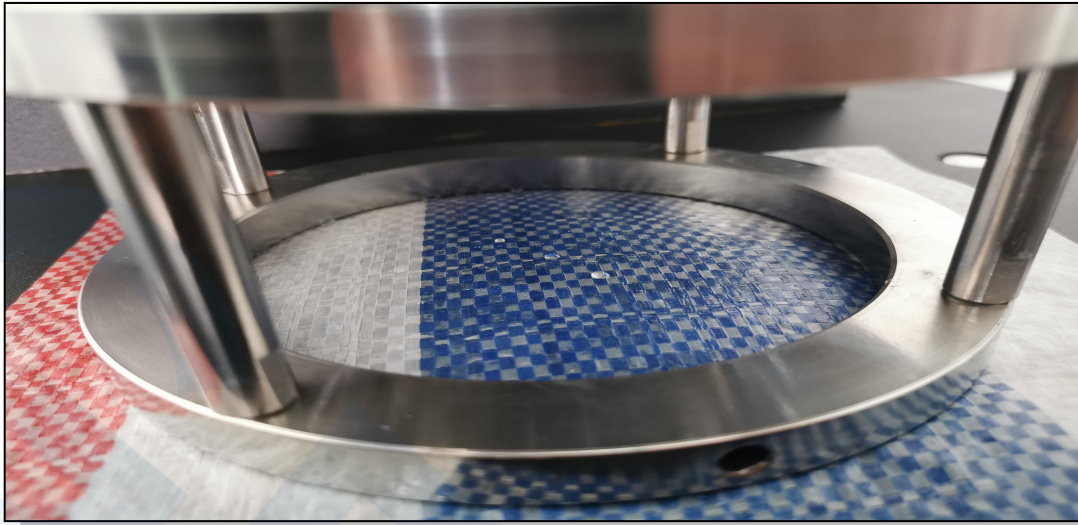

## Feature

- Touch-Screen display with English menu.
- Internally installed water tank design and original water pressure balance system makes the rate of rise stable and exact.

### Side View of Fixture

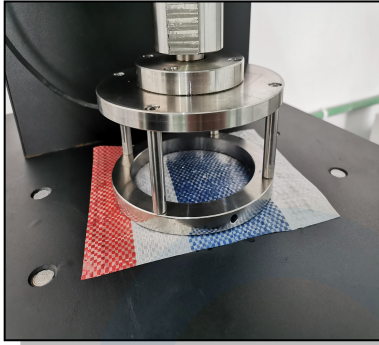


All parts may touch water using 304 stainless steel.

### Printer



Can print out the data.

### Calibration Plate

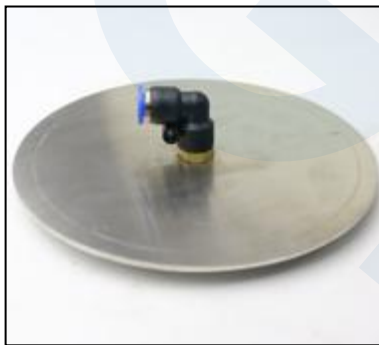

Use for calibration.

### Control panel




Touch screen control panel.

### Water Outlet



Use for drain off water.

### Test Sample

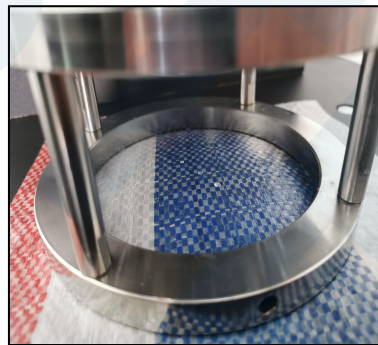

Put test sample.

### Side View



Side view of whole machine

### Front View



Front view of whole machine

## Key Specification

Model	GT-C26A
Testing range	500pa-200kpa
Water pressure increase rate	1kpa-30kpa
Accuracy	0.2%F.S
Clamping method	Pneumatic clamping
Specimen test area	100cm <sup>2</sup> , or 7.8cm <sup>2</sup> (Option)
Testing mode	1) P. Rise 2) Const P & Timing 3) Const P & Time 4) Water Penetration 5) Fatigue
Testing unit	KPa, PIS, mmH <sub>2</sub> O, cmH <sub>2</sub> O, mbar
Power supply	AC 220V 50/60HZ
Dimension	600 x 450 x 640mm (L x W x H)
Weight	60 kg

## Standards

AATCC 127 Option 2, ISO 811, ISO 1420, GB/T4744, FZT01004, DIN53886, JIS L1092-7.1.1, EN20811, EN 13726-3

## Accessories

Standard accessories	1Set	100cm <sup>2</sup> testing sets
	1Set	Calibration plate
	2pcs	Rubber ring
	1pc	Power line
Optional accessories	Optional	Fixtures of other testing range